



ESSENTRA


PACKAGING

Supastrip®

**26 MICRON MOPP
Specification Sheet**

PRODUCT DESCRIPTION

Supastrip® is available in tape widths ranging from 1.6mm - 20mm at lengths of up to 120km and can be wound onto a choice of cores including 29mm, 76mm, 82.5mm and 152mm internal diameter. Other core sizes are available on request.

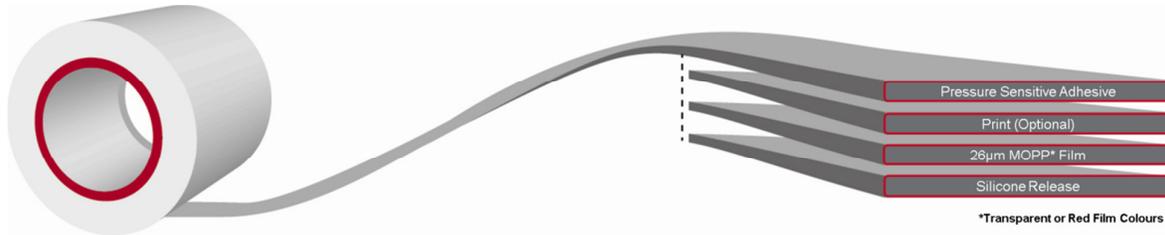

PROPERTY	TEST METHOD	UNITS	SPECIFICATION
Tape width tolerance	Essentra Packaging QC106	mm	± 0.1
Film thickness	AFERA 5006	µm	26 ± 2
Total tape thickness	AFERA 5006	µm	37 ± 5
Breaking strength	AFERA 5004	kgf/25mm	≥24
Elongation at break	AFERA 5004	%	≥15
Tensile strength at break	AFERA 5004	kgf/mm ²	≥40
Tensile modulus at 10% elongation	Essentra Packaging QC056A	kgf/mm ²	≥200
Peel adhesion to stainless steel	FINAT FTM 1	gf/25mm	≥400
Loop tack to glass	FINAT FTM 9	gf/25mm	≥400

Values quoted are based upon tests which Essentra Packaging believes to be reliable. The values are intended as a source of information and are given without guarantees and do not constitute a warranty. Prior to use, purchasers should independently determine the suitability of any product for a specific purpose.

FURTHER INFORMATION

All Supastrip® products are traverse wound with the adhesive on the inside.

All joins are transparent butt joints which are designed to unwind without the tape breaking.

Product design information can be found on Essentra Packaging studio artwork documentation.

Information on storage, shelf life and regulatory status can be found in Essentra Packaging Supastrip® Quality, Environment and Regulatory Statement.

ESSENTRA PACKAGING

Giltway
Giltbrook
Nottingham
NG16 2GT
United Kingdom

T +44 (0)1159 759000
F +44 (0)1159 759001
E info@essentrapackaging.com

www.essentrapackaging.com

Issued by: Technical Service Department
Date: 5th February 2015

Issue number: 2
Page: 1 of 1

Registered in England No. 07271407